



BUSH HOG®
Performance You Can Count On™

2515 Series



Flex-Wing Rotary Cutters

An economical cutter for pastures, stalks and general mowing, featuring “EZ Clean Decks.”

Designed to cut weeds, grasses and material up to 2-inch in diameter, the Bush Hog® 2515 Flex-Wing Rotary Cutter is an outstanding choice for use with tractors in the 50 to 120 HP class. It is recommended for use on rolling terrain, drainage areas, general pasture maintenance, airstrips or whenever you need a wide cut in a single pass over the field.

The 2515 has plenty of features to assure operating ease, durability and high performance cutting. And like all Bush Hog® rotary cutters, it is built for dependability.


Bush Hog® 2515 Series Rotary Cutters

Ideal for lower horsepower tractors and economical mowing.

Greasable Axle Turnbuckles for Ease of Adjustments




Greasable Axle Pivots for Extended Wear

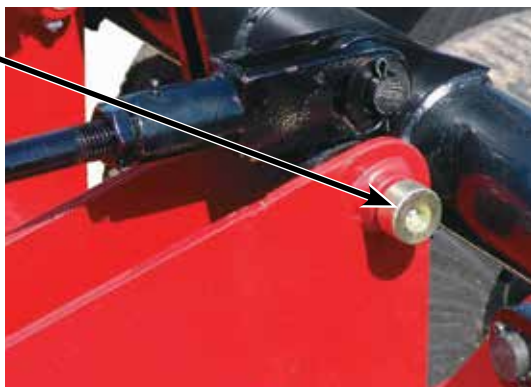

110 HP Gearbox With Slip Clutch and Quick Detach Shield



Dual Spring Shock Absorption on Center Axle Assembly

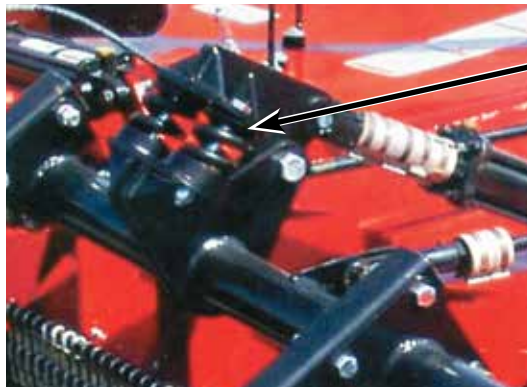

SPECIFICATIONS

Cutting Width _____	180-inches	Center & Wing Gearbox Rating _____	110 HP
Transport Width _____	96-inches	Slip Clutch _____	3 Multiple Plate Clutches
Overall Width _____	186-inches	Type Blade Holders _____	Round
Length _____	184-inches	Blades _____	1/2 x 4-Inch, Uplift
Hitch _____	Self-Leveling Pull Type with Swivel Clevis	Blade Overlap _____	6-inches
Cutting Height _____	2 to 14-inches	Blade Tip Speed: _____	15,268 fpm
Cutting Capacity _____	Through 2 Inch Diameter	Wing Lift Hydraulics _____	Standard Equipment
Deck Thickness _____	10-Gauge Box Section Steel	Wing Flex _____	90° Up to 22° Down
Side Band _____	12" X 1/4-inch Steel	Wheels _____	Laminated Tires, 15" Pneumatic Wheels, Aircraft Tires
Tractor Horsepower Recommended _____	50 - 120	Shock Protection _____	Springs on Center Section
PTO Driveshaft _____	Constant Velocity, 1-3/8" ASAE	Jackstand _____	Standard Equipment
	Cat. 5 540 RPM or Cat. 4 1000 RPM	Safety Tow Chain _____	Standard Equipment
Driveshaft (Wings) _____	ASAE Category 4	Deflectors: _____	Banding & Belting Standard Chains Optional
PTO RPM _____	540 or 1000		
Splitter Gearbox Rating _____	160 HP		

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Dealer Info:



BUSH HOG®
Performance You Can Count On™

www.bushhog.com

Bush Hog®, Inc.
2501 Griffin Ave., Selma, AL 36703
(334) 874-2700

©May 2014 Bush Hog®, Inc.