



BUSH HOG®
Performance You Can Count On™

2720 Series



- 20 foot cutting width
- Wings “float” during operation for a closer cut
- 10-gauge steel deck and heavy duty gearboxes
- 5-year limited gearbox warranty

**Your best choice for
all terrain mowing
and highway cutting!**

Flex-Wing Rotary Cutters

**Recommended for medium duty cutting on large
contoured fields and rights-of-way.**

Bush Hog's 2720 Series Flex-Wing Rotary Cutters are available in a choice of models with 540 or 1000 rpm gearboxes and a choice of single or double row chain shielding.

The 2720 is designed for medium duty mowing. Deck construction is box-sectioned 10-gauge steel and 1/4 x 10-1/2-inch side bands provide plenty of room for high capacity discharge. Spring shock absorption at each axle arm provides protection from the shock loads encountered when working on uneven terrain. Three multiple-plate slip clutches are standard equipment.

Bush Hog® 2720 Series Flex-Wing Rotary Cutters

**Made In America.
Built To Last.**


**The 2720 Flex-Wing is an
Excellent Choice for Medium Duty Cutting.**

Standard deck ring helps to reduce blade-to-deck contact.



Wide wing skids mean reduced skid "dig-in" on sharp turns.

The 2720 is available with round pans or shredder blade bars. The shredder bar has four blades. The optional shredder kit consists of another blade bar with two blades. (For clarity, the standard deck rings are not shown in this photo.)

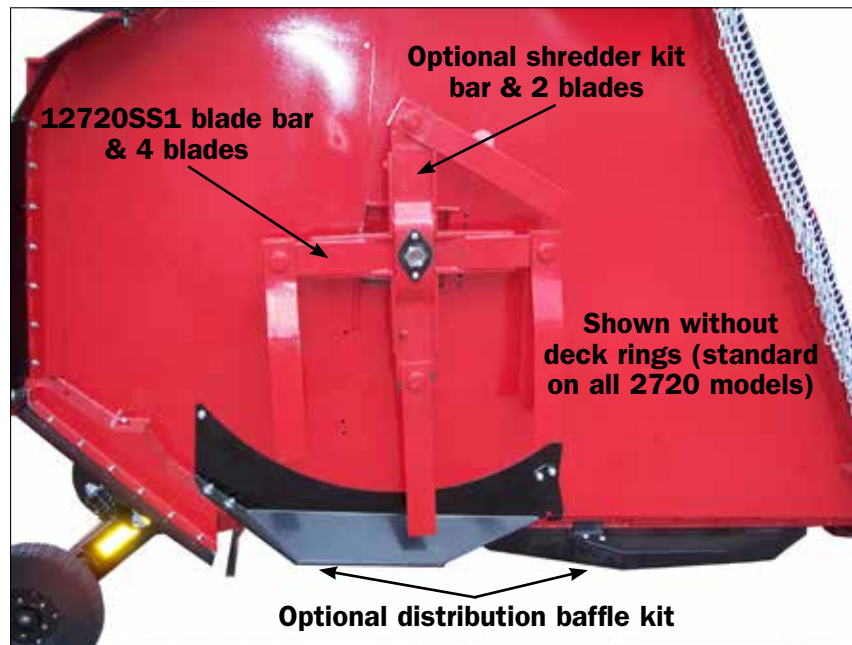

SPECIFICATIONS

Cutting Width: 20 feet
Transport Width: 136 inches
Hitch: Self-leveling with Perma-level clevis
Cutting Height: 2 - 14 inches
Deck: 10 gauge steel
Side Bands: 1/4 x 10-1/2 inches
Recomm. Tractor PTO HP: 90

Gearboxes: Splitter/250 HP center and wings/210 HP
Slip Clutch: (3) 4-plate
Blades: 1/2 x 4 inch, uplift
Blade Tip Speed: 15,000 fpm
Wing Lift Hydraulics: Standard
Wing Flex: 87° up to 22° down

Wheel Shock Protection: Independent springs - each axle arm
Jackstand: Standard
Safety Tow Chain: Standard
Center Lift Hydraulic: Standard
Safety Shields: Front and rear single row or double row chains.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Warning: For non-agricultural use, OSHA, ASAE, SAE and ANSI standards require the use of chain guards or other protective guards at all times. Bush Hog strongly recommends the use of such guards for agricultural uses as well, to reduce the risk of property damage, serious bodily injury or even death from objects thrown out by or from contact with the cutting blades.

Dealer Info:



BUSH HOG®
Performance You Can Count On™

www.bushhog.com

Bush Hog®, Inc.
2501 Griffin Ave., Selma, AL 36703
(334) 874-2700

©Oct. 2013 Bush Hog®, Inc.